

ARCH Upholstered Sofa 2-Seater

Designed by MAZO x Magnus Stephensen in 2020

Art no: 10601-10635

ARCH originates from a basic study of forms and embodies a mixture of lightness and weight as contrasts in discreet interaction with each other; straight sculptural lines are flanked by the curves of the armrest, an embodiment of the 'midcentury' functionalism.


General information

DESCRIPTION	The ARCH collection is a furniture series constructed of two upholstered frames suspended between laminated veneer legs.
VERSION	Fully upholstered in fabric/leather Base/legs: Solid oak wood.
PRICE GROUPS	1 to 6 Sheepskin COM
COLORS	Solid oak wood with natural colored oil surface treatment. Solid oak wood with Dark colored oil surface treatment. Solid oak wood with Black Stained surface treatment.
ACCESSORIES	Felt gliders are standard.
ENVIRONMENT	Can partly be separated and sorted for recycling.



Dimensions

MEASUREMENTS W x H x D	Seat width: 1280mm Seat height: 410mm Seat depth: 550mm Back Height: 350mm Sofa full width: 1400mm Sofa full height: 760mm Sofa full depth: 790mm
WEIGHT SOFA	35 kg
PACKAGING TYPE	Pallet, Cardboard box, Soft Masonite, PE foam and heavy-duty plastic.
PACKAGING MEASUREMENTS W x H x D	1000mm x 1850mm x 730mm
WEIGHT PACKAGING MATERIAL	18 kg
WEIGHT-TOTAL	53 kg
NUMBER OF PARCELS	1 pcs. / colli
FULLY UPHOLSTERED FABRIC CONSUMPTION W X L	Sofa fabric: 140cm x 400cm

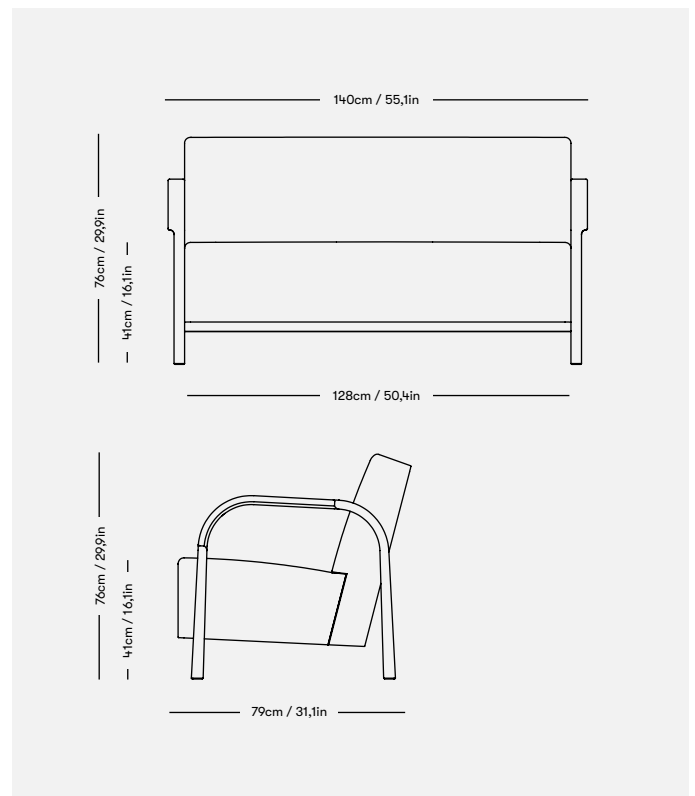

Cleaning & maintenance

CLEANING For cleaning the upholstered surface, first try to brush off the dirt gently. If this is not enough, then vacuum the surface. If further cleaning of the upholstery is needed, a stain remover is recommended. The cleaning must be gentle and must always be tested on the most invisible area of the surface before the actual cleaning. Avoid blotches by gentle, circular rubbing towards the stain. To avoid stains, quickly remove the dirt with a piece of absorbing household wipe and clean with water and colourless washing-up liquid. Do not use the following products for the padding:

- Undiluted cleaning liquids.
- Bleach.
- Ammoniac.
- Soap for hard surfaces.

For dusting and light cleaning of the frame use a soft, dry cloth. For further cleaning of the frame, use a soft cloth that is firmly wrung in clean water for gently wiping the surface, and then immediately use a dry cloth to wipe the surface again. Do not use materials for maintenance that:

- Contain abrasive agents.
- Are basic, acidiferous or organic.

For the best maintenance of the product, protect it against sunlight and heat, and try to keep it away from moisture, grease and other dirt. Furthermore, protect the surfaces against sharp objects and other that might scratch.

MAINTENANCE We recommend to re-oil once a year.